


P8600 SERIES

Nitrile-Vinyl Foam Tape: (NBR / PVC)

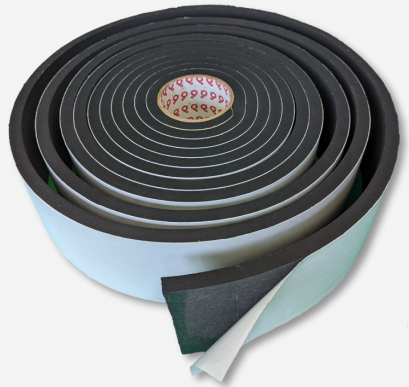

- Soft Density
- Closed Cell Gasket
- UL Listed
- Environmentally-Friendly
- Weather Resistant
- Sound Absorbing
- Compressible
- Flame and Smoke Rated
- High Performance Acrylic Adhesive.

Markets:


- Construction
- Walls, Mullions
- Clean Rooms
- IT Server Rooms
- HVAC
- Acoustical Ceilings
- Enclosures
- Commercial Refrigeration Units

Excellent Choice for Applications Requiring:

- **Weather Resistant, Air Tight Gap Seals**
- **Sound Absorption & Vibration Deadening**
- **Insulation; Gap Filling, or Pipe Wrap**
- **Flammability and Smoke Rated**
- **Permanent Bond, Flexible Applications**
- **Hot to Cold Temperature Resistance**

**PRES-ON'S
WET COAT
ADHESIVE
ADVANTAGE.**

Our adhesive is applied as a liquid. Promoting a superior bond to the texture of the foam.
Reduces Delaminating.

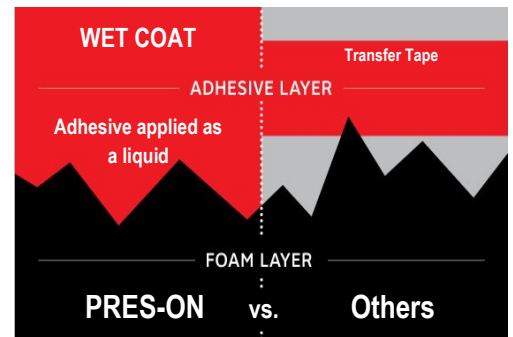

- Foam Thickness:** 1/8", 1/4", 3/8", 1/2", 3/4", 1"
- Roll Widths:** 1/4" up to 50"
- Roll Lengths:** 50' (1/8"-1/4"), 25' (3/8" and above)
- Shapes:** Long Length Spools, Customizable Cut Shapes, Sheets

Foam Technical Data

Foam Material:	NBR / PVC Blend
Hardness:	Soft
Color:	Black
Cell Type	Closed Cell Foam
Weather Resistance (UV)	Good
Adhesive:	Acrylic, Permanent
Single Sided Adhesive Tape	Yes
Double Sided	Available (special order)
Adhesive Indoor Rating	Excellent
Adhesive Outdoor Rating	Excellent
Adhesive Functional Temp.	0-225° F

Density	3-6 pcf	ASTM D1056
Temperature	-40°F to 220°F	ASTM C534
Pressure to Compress 25%	2-5 psi	ASTM D1056
Sound Absorption	.25 NRC @ 1" of material	ASTM C423
R Value	1.5 @ 3/8" 2 @ 1/2" 3 @ 3/4" 6 @ 1.5" 6 @ 1.5" 8 @ 2"	
Flammability	PASS	FMVSS-302, ASTM D635
Flame and Smoke	Meets Requirements	NFPA 90A/B, ASTM E84
UL Rating - Flammability	#E300774	UL 94-5V, VO Flammability
Environment Friendly	Free of CFCs, HFCs, HCFCs, PBDEs, Formaldehyde	
Mold, Fungal, Bacteria, Mildew	Resistance	
Food Safety Compliance	USDA / CFIA Compliant	

Adhering to a higher standard™




Find the right product for your application today! Call Pres-On at 800-323-7467. visit www.preson.com, or email sales@preson.com.

2600 E. 107th Street | Bolingbrook, IL 60440
630-628-2255 | www.preson.com

P8600 SERIES

P8600 Series - Blended Nitrile Vinyl (NBR / PVC) Foam Tape:

Soft Density • Closed Cell Gasket • Insulation • Sound Absorbing • Weather Resistant • 2B1 Foam • UL Listed •
 Flame and Smoke Rated • Environmentally-Friendly • High Performance Acrylic Adhesive.



Material:	NBR / PVC Blend (Nitrile Vinyl)
Pres-On Tape Material Category:	Rubber / Synthetic Rubber Tapes
Hardness:	Soft
Color:	Black
Texture:	Smooth, No Skin
Cell Type:	Closed Cell Foam
UV - For Outdoors (sunlight)	Good

Material Technical Data	Result	Test / Note:
ASTM D1056 Classification	2B1	ASTM D1056
ASTM C534 Classification	Type 2, Grade 1	ASTM C534
Oil Resistance	Good	
Pressure to Compress 25%	2-5 psi	ASTM D1056
Density (+/- 2)	3-6 pcf	ASTM D1056
Shore	30 OO Durometer	
Compression Set 50%	35%	ASTM D1056
Water Absorption	0%	ASTM D1056 / ASTM C209
Temperature	-40°F to 220°F	ASTM C534
Food Safety Compliance	USDA / CFIA Compliant	
Flammability	PASS	FMVSS-302, ASTM D635
UL Rating - Flammability	#E300774	UL 94-5V, VO Flammability
Thermal Conductivity	90°F = 0.258 K, 75°F = .245 K, 32°F = .235 K	ASTM C177
Flame Smoke Development	<25/50 (surface burning characteristics of building materials)	ASTM E84
Flame and Smoke	Meets Requirements	NFPA 90A/B
RoHS Compliant	Yes	
UL Greenguard®	Gold Certified	
Energy Code Requirement	ASHRAE 90.1 & 189.1	
Environment Friendly	Free of CFCs, HFCs, HCFCs, PBDEs, Formaldehyde and Fibers	
Mold, Fungal, Bacteria	EPA registered antimicrobial agent incorporated	
Mildew Growth Resistance	PASS	UL 181, STM G21
Ozone Resistance	PASS	ASTM D1171
Odor Emissions	No Objectionable Odor	ASTM C1304
Sound Absorption	.25 NRC @ 1" of material	ASTM C423
R Value	1.5 @ 3/8", 2 @ 1/2", 4 @ 1", 6 @ 1.5", 8 @ 2"	

Sizes

Available Options:

Thickness:	1/8" P8612	1/2" P8650
	1/4" P8625	3/4" P8675
	3/8" P8637	1" P861
Length:	Standard Roll & Custom Lengths	
Spooling:	Available	Continuous Length
Width:	Any roll width up to full 54" log rolls	
Die Cuts / Sheets:	Available	Kiss-Cut, Kits, Separate, Drawings

Adhesive

Type / Rating

Adhesive	Acrylic, Permanent	Direct Coat (wet coat)
Single Sided Adhesive Tape	Yes	PSA on One-Side
Double Sided Adhesive Tape	Available	Special Order, High MOQ
Adhesive Indoor Rating	Excellent	
Adhesive Outdoor Rating	Excellent	based on application
Adhesive Functional Temperature	0-225° F	
Adhesive Shelf Life	2 Years	Room Temp. @ Relative Humidity
Filter		Mylar Available for Die Cuts
No Adhesive (special option)	Plain	Order Min / Mult. Required

Color and Finish may vary based on lot. Measurement tolerances vary based on thickness and width, contact Pres-On for specific tolerance to finished product. **APPLICATION NOTES:** Ensure surfaces are well unified, clean, dry, and free of dirt / oils. Apply firm and even pressure to adhesive-to-surface contact. Allow proper temperature / time to enhance bond strength. It is the end user's responsibility to determine final suitability of Pres-On's product for use in their application. **For Terms and Conditions:** <https://www.preson.com/terms-conditions/>

Adhering to a higher standard™