


## PHB5200 TAPE: Extreme Sealing Tape.

Single sided high-performance acrylic based tape. Designed for difficult sealing applications. With an ionomer backing, the tape is very tough, flexible, abrasion resistant and paintable.

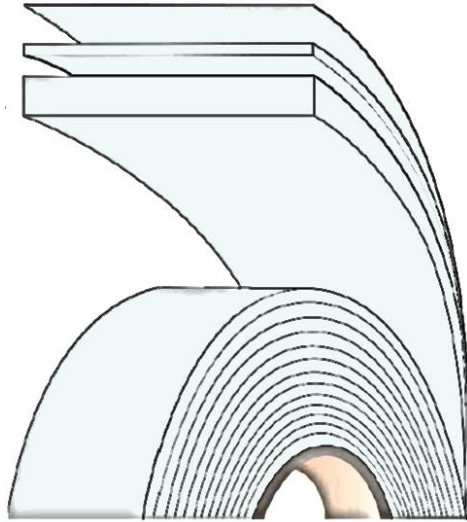

Liner:	PET Release Liner
Core:	Closed Cell Acrylic
Adhesive:	Closed Cell Acrylic
Density:	900 kg/m <sup>3</sup>
Color:	Clear, Black, or Grey
Temperature:	Min.: -40 C Max.: 95 C

### Suitable for:

Soft and flexible for easy mold contours, edges, rivets, screws.

#### Applications:

- Motorhome Leaks,
- Roof and Gutter Holes / Tears,
- Transportation Industry

### 90° Peel Adhesion: 12 lb/in

Based on ASTM D-3330, various substrates, 72 hour room temp with AFTC-AM1008HC attached to aluminum peel strip backing; adhesion promoter or primer used on substrates.

### Tensile Strength: 90 lb/in

**APPLICATION NOTES:** Ensure bonding surfaces are well unified, clean, dry, and free of dirt and oils. Apply firm and even pressure to improve adhesive-to-surface contact. Allow proper temperature and time to enhance bond strength.

For Terms and Conditions: visit <https://www.preson.com/terms-conditions/>

Adhering to a higher standard™