


VF1300 SERIES

PVC Foam Tape:

- Soft Density
- Closed Cell Gasket
- Acrylic Adhesive.
- Weather Resistant
- Sound Absorbing
- Compressible
- Flame and Smoke Rated

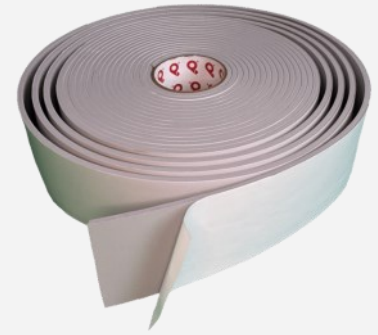

Markets:


- Construction
- Packaging
- Clean Rooms
- Automotive
- HVAC
- Acoustical
- Enclosures
- Glass, Windows, Doors

Excellent Choice for Applications Requiring:

- **Weather Resistant, Air Tight Gap Seals**
- **Sound Absorption & Vibration Deadening**
- **Insulation; Gap Filling**
- **Flammability**
- **Permanent Bond, Flexible Applications**

PRES-ON'S WET COAT ADHESIVE ADVANTAGE.

Our adhesive is applied as a liquid. Promoting a superior bond to the texture of the foam.
Reduces Delaminating.

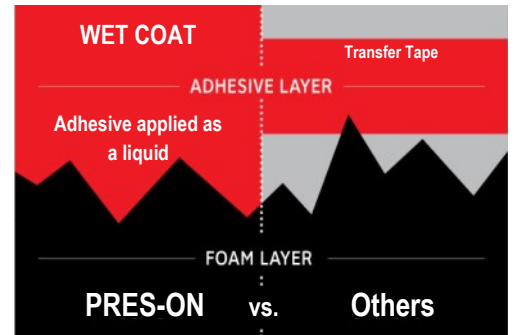

Material	PVC Foam
Cell Structure	Closed Cell
Type Of Tape	Single Sided, Plain, no adhesive
Adhesive	Acrylic
Thickness	1/16", 1/8", 3/16", 1/4", 3/8"
Produced As	Rolls, Spools, Sheets, Pre-Cut Shapes
Roll Widths	1/4" to 54" wide
Softness	Soft
Color	Gray
Texture	Skin
Foam High Temperature Rating	179 F
Foam Low Temperature Rating	-4 F
Outdoor	Excellent
Adhesive Temperature Range	-20 F to 200 F (Acrylic)
Compression Deflection	1 psi, 25% compression
Durometer Shore	25 OO
Density	5.5-10 lb/ft ³
Tensile Strength	25 PSI
Elongation	1.5
Flammability	Yes, FMVSS-302
Skin Contact	approved for PPE, Biocompatible
Chemical Resistance	Excellent
Thermal Conductivity	.27 BTU-IN/FT ² -HR-°F
Additional Specs	Fungi Resistance, Oxidation Resistance
Reach / RoHS	Yes
Made In:	Bolingbrook, IL USA

Adhering to a higher standard™



Find the right product for your application today! Call Pres-On at 800-323-7467.
visit www.preson.com, or email sales@preson.com.

2600 E. 107th Street | Bolingbrook, IL 60440
630-628-2255 | www.preson.com