

SG6800 SERIES

Polyurethane Foam Tape:

- Medium Density
- UV Resistance
- Breathable Gasket
- Low Compression Set
- Permanent Acrylic Adhesive.
- Dimensionally Stable

Markets:

- Windows
- Construction
- Structural Glazing
- HVAC




Excellent Choice for Applications Requiring:

- **Structural Glazing Applications**
- **Low Compression Set**
- **Permanent Bond**
- **Breathable**
- **Flexible Applications**

**PRES-ON'S
WET COAT
ADHESIVE
ADVANTAGE.**

Our adhesive is applied as a liquid. Promoting a superior bond to the texture of the foam.
Reduces Delaminating.

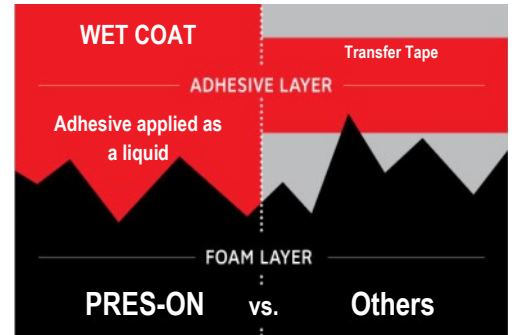

Material	Polyurethane, Urethane
Cell Structure	Open Cell, Breathable
Type Of Tape	Single Sided, Plain, no adhesive
Adhesive	Acrylic
Thickness	1/4"
Produced As	Rolls, Spools, Sheets, Pre-Cut Shapes
Roll Widths	1/4" to 54" wide
Softness	Medium
Color	Black
Texture	Smooth
Durability	Great
Foam High Temperature Rating	250 F
Foam Low Temperature Rating	-40 F
Outdoor	Excellent
UV Exposure	Excellent
Adhesive Temperature Range	-20 F to 200 F (Acrylic)
Compression Deflection - ASTM D1056	24-36 psi, 25% compression
Durometer Shore	31 Shore A
Density - ASTM D3574	15-21 lb/ft ³
Tensile Strength - ASTM D3574	200 PSI
Compression Set - ASTM D3574	3%
Elongation - ASTM D3574	125%
Tear Strength - ASTM D624	21 pli
Application	Structural Glazing Tape
Industry	Windows
Reach / RoHS	Yes
Made In:	Bolingbrook, IL USA

Adhering to a higher standard™



Find the right product for your application today! Call Pres-On at 800-323-7467.
visit www.preson.com, or email sales@preson.com.

2600 E. 107th Street | Bolingbrook, IL 60440
630-628-2255 | www.preson.com